
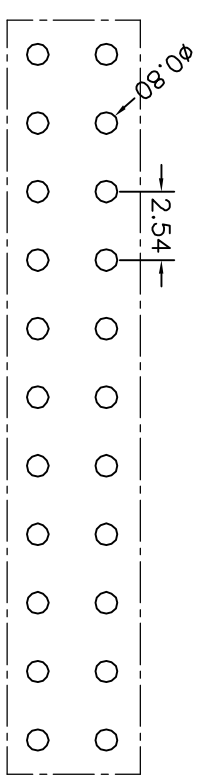
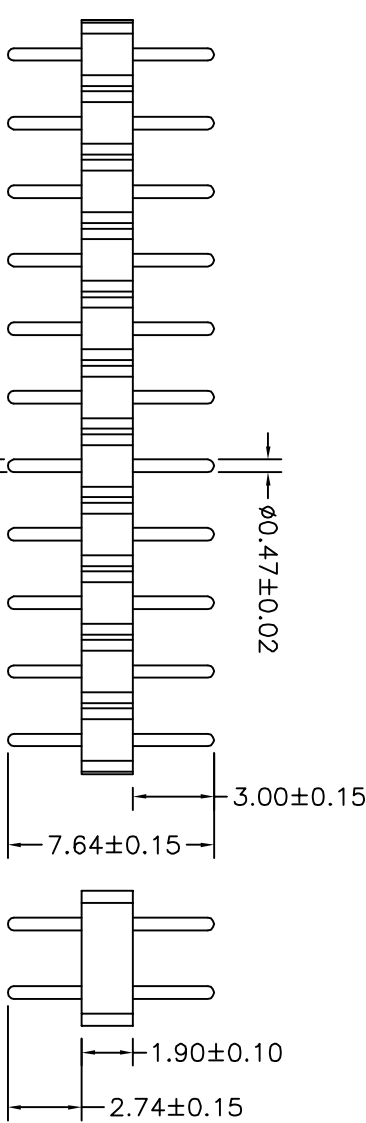


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	16-3-18

Technical Data
 Material: Pin(outer sleeve): Brass, machined CuZn38Pb2
 Plating(outer sleeve):
 Tin Plated: 2μm/80μm "Ni, 5μm/200μ" Sn
 Gold Plated: 2μm"/80μm "Ni, 0.8μ" gold
 Insulator: PPS UL94V-0

Electrical:
 Current rating: 3Amps/contact max.
 Contact resistance: ≤ 4mΩ/contact
 Insulation resistance: ≥ 1000MΩ at V=100V
 Operating voltage: 60VAC/DC

Mechanical:
 Mechanical life cycle: min 500
 Operating temperature: -40 ° C to +105 ° C
 Soldering temperature: +255 ° C

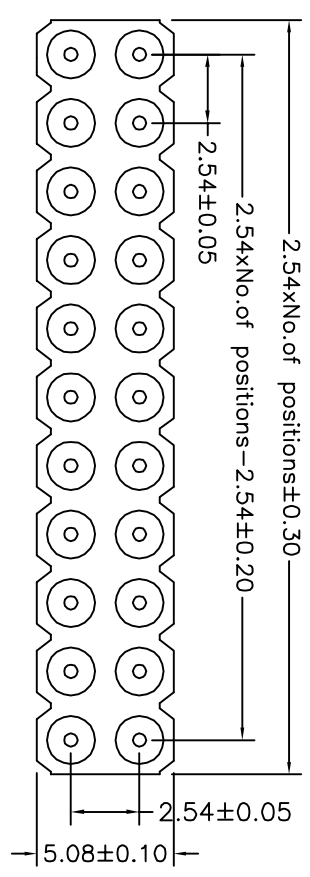

P. C. B LAYOUT

QZT1	X	X	X	XX	XX	XXX	X
Pitch(mm) A=1.27 B=1.778 C=2.00 D=2.54	Insulator Type code 1=Single row 2=Double row 3=Three row	Angel Options D=180° R=90° S=SM I=IC	No. of Positions XX	Pin plated T1=Pin 150u" G1=Q/F G2=Gold 3u" G3=Gold 10u" G4=Gold 15u" G5=Gold 30u"	Pin Length Options 076f=7.6mm	Specifications A=Female seat B=Female seat	

QZtconn 启之泰 东莞市启之泰电子科技有限公司

TOLERANCE	PROJECTION	TITLE:
X, XXX ± 0.05 X, XX ± 0.15 X, X ± 0.20 X, ± 0.30 ANGLE ± 5.0°	DATE: 2016-3-18 DRAWN: TANG-S-G CHECKED: APPROVED:	Double row socket connector 2.54mm L=7.64mm H=1.90 PART NO: QZTD2-DXXXXX0764A DRAWING NO: 2016031808