

Four finger clips

qztconn



启之泰

Technical Specs:

Material: Beryllium copper (C17200)

Rated current: 3A

Contact resistance: Max.4mΩ

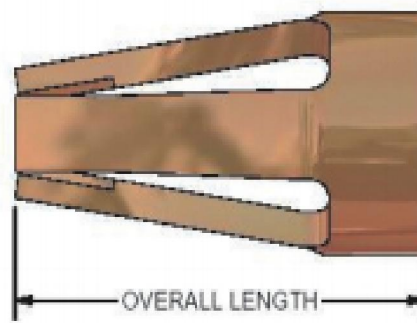

PART NO	OUTSIDE DIAMETER	OVERALL LENGTH	OPERATING RANGE PIN DIA	TEST PIN DIAMRTER	MAXIMUM INSERTION FORCE	MINIMUM WITHDRAWAL FORCE
QZT-1S	1.118	1.651	.381-.559	0.457	135 GM	25 GM
QZT-1SH	1.118	1.651	.381-.559	0.457	260 GM	55 GM
QZT-3S*	1.118	1.651	.381-.559	0.457	520 GM	120 GM
QZT-1L	1.118	2.108	.381-.559	0.457	45 GM	15 GM
QZT-3*	1.118	2.108	.381-.559	0.432	270 GM	90 GM
QZT-3H	1.118	2.108	.381-.559	0.457	675 GM	200 GM
QZT-4	1.346	2.972	.559-.813	I-0.660 W-0.610	385 GM	50 GM
QZT-5	1.753	3.810	.914-1.270	1.016 0.762	325 GM 55 GM	60 GM 15 GM
QZT-6	2.032	3.810	1.016-1.499	I-1.270 W-1.016	375 GM	35 GM
QZT-7S	1.626	2.143	.813-1.143	1.016	2.27 KG	200 GM
QZT-7	1.613	3.048	.813-1.168	1.041 0.991	350 GM	55 GM
QZT-7L	1.626	3.048	.813-1.143	I-1.016 W-0.889	1.02 KG	110 GM
QZT-8	2.235	3.150	1.219-1.626	I-1.524 W1.270	440 GM	60 GM
QZT-9	2.743	3.759	1.651-2.083	I-1.880 W1.829	1.36 KG	230 GM

NOTE: *-SIZING PIN DIAMETER IS 0.533