


Three finger clips



Technical Specs:
 Material: Beryllium copper (C17200)
 Rated current: 1A
 Contact resistance: Max.4mΩ

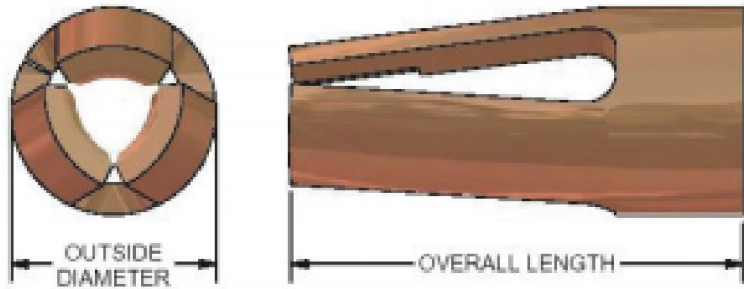

PART NO	OUTSIDE DIAMETER	OVERALL LENGTH	OPERATING RANGE PIN DIA	TEST PIN DIAMRTER	MAXIMUM INSERTION FORCE	MINIMUM WITHDRAWAL FORCE
QZT-1*	0.787	1.905	.381-.508	0.432	80 GM	15 GM
QZT-1L*	0.787	1.905	.381-.533	0.457	90 GM	14 GM
QZT-2	0.813	1.27	.381-.457	0.432	400 GM	100 GM
QZT-3	0.787	1.905	.381-.508	0.432	42 GM	14 GM
QZT-3X	0.787	1.905	.381-.533	0.457	30 GM	10 GM
QZT-4	0.5969	1.651	.178-.330	0.279	30 GM	9 GM
QZT-5	0.4978	1.346	.152-.279	0.203	30 GM	10 GM

NOTE: *-SIZING PIN DIAMETER IS 0.533